

YY

Ties with A World of Difference

CABLE ACCESSORIES



SINCE 1964
YONYU GROUP

Y.Y. CABLE ACCESSORIES CO., LTD

P.C.B. FASTENERS

PC 板固定零件




LOCKING WIRE SADDLE

(80) 隔離束線座

- ◎材質：Nylon 6/6
- ◎防火等級：UL 94V-2
- ◎顏色：本色
- ◎適用機孔 $\Phi 4.8\text{mm}$

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Natural
- Lift wires off board to avoid hot components and minimize transient interference
- Resists to vibration or shock
- Mounting hole diameter $\Phi 4.8\text{mm}$



品名 ITEM NO.	機板厚度 D PCB THICKNESS	尺寸 DIMENSIONS			包裝 PACKING
		A mm	B mm	C mm	
WS-05	2.0	12.7	11.0	4.0	500pcs
WS-10	2.0	17.9	11.0	8.6	
WS-11	2.0	26.9	11.0	18.2	
WS-C20	2.0	28.05	11.0	19.15	




TWIST HOLDERS

(80) 隔離扭線環

- ◎材質：Nylon 6/6
- ◎防火等級：UL 94V-2
- ◎顏色：本色
- ◎適用機孔 $\Phi 4.8\text{mm} \sim \Phi 5.0\text{mm}$

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Lifts and routes wires
- Improve circuit safety by over-routing hot components
- Mounting hole diameter $\Phi 4.8\text{mm} \sim \Phi 5.0\text{mm}$



品名 ITEM NO.	機板厚度 E PCB THICKNESS	尺寸 DIMENSIONS				包裝 PACKING
		A mm	B mm	C mm	D mm	
TH-03	0.5~2.0	$\Phi 11.5$	19.55	10.50	14.00	1,000pcs
TH-04		$\Phi 20$	16.20	10.40	16.00	
TH-10		$\Phi 7.0$	32.30	10.50	14.00	




MINIATURE SUPPORT POST

(80) PC 板隔離插柱

- ◎材質：Nylon 6/6
- ◎防火等級：UL 94V-2
- ◎顏色：本色
- ◎適用機孔 $\Phi 4.0\text{mm}$

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Natural



品名 ITEM NO.	尺寸 DIMENSIONS		包裝 PACKING
	A mm (in.)	D Φ mm	
MSP-3	3.2 (0.13")	4.0	2,000pcs
MSP-6	6.3 (0.25")		
MSP-8	8.2 (0.32")		
MSP-10	10.5 (0.41")		
MSP-15	15.9 (0.62")		
MSP-19	19.1 (0.75")		1,000pcs

P.C.B. FASTENERS

PC 板固定零件




DUAL LOCKING SUPPORTS

(80) 雙鉤式隔離插柱

- ◎材質：Nylon 6/6
- ◎防火等級：UL 94V-2
- ◎適用機孔 $\Phi 4.0$
- ◎雙鉤插式設計可承震動，適用一般 PC 板及電子零件之固定

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Barbed arrow mounts on both ends locking securely
- For PCB / Chassis spacers

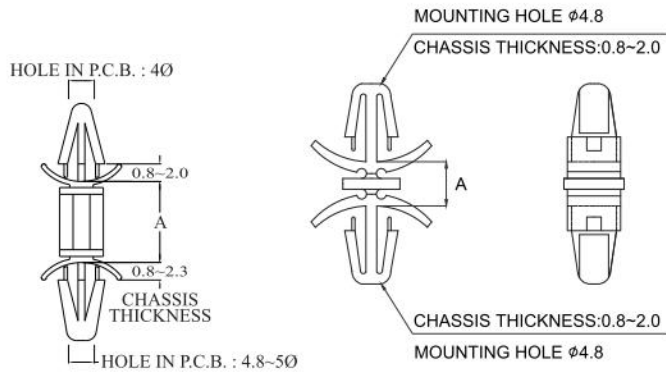

DLS-5A

品名 ITEM NO.	A mm	包裝 PACKING
DLS-5	4.8	1,000pcs
DLS-5A	4.8	
DLS-6	6.4	
DLS-10	9.4	
DLS-12	12.7	
DLS-16	15.9	
DLS-19	19.1	
DLS-22	22.2	
DLS-25	25.4	
DLS-31.7	31.7	




SCREW FASTENED CIRCUIT BOARD SUPPORT

(80) 平底式隔離插柱

- ◎材質：Nylon 6/6
- ◎防火等級：UL 94V-2
- ◎一般用於不加底板之機器，固定後不會凸出底座

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Attached M3 screw to chassis



品名 ITEM NO.	A mm	螺絲 SCREW	包裝 PACKING
SBS-5	5	M3	1,000pcs
SBS-10	10		
SBS-15	15		
SBS-20	20		
SBS-29	30		500 pcs
SBS-35	35		

P.C.B. FASTENERS


PC 板固定零件



SLIDE SPACER SUPPORTS (80) 推式隔離插柱

◎材質：Nylon 6/6
◎防火等級：UL 94V-2

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Insert support from larger hole and slide onto the smaller




品名 ITEM NO.	尺寸 DIMENSIONS			包裝 PACKING
	A mm	B mm	C mm	
SSS-6	6.4	1.5~2.3	0.8~1.5	1000pcs



REVERSE SPACER SUPPORT (80) PC 板間隔柱

◎材質：Nylon 6/6
◎防火等級：UL 94V-2
◎適用 $\Phi 4.0\text{mm}$ 機板，底孔孔徑 $\Phi 5.5\text{mm}$

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Snap into chassis and board holes with finger, insert from chassis hole underside
- Hole in P.C.B $\Phi 4.0\text{mm}$; Chassis dia.: $\Phi 5.5\text{mm}$




品名 ITEM NO.	尺寸 DIMENSIONS			包裝 PACKING
	A mm	B mm	C mm	
RSS-6	6.4	1.6	0.8~1.2	1000pcs
RSS-8	8			
RSS-10	10			
RSS-12	12.7			
RSS-15	15.9			
RSS-19	19			



MUSHROOM SPACER SUPPORTS (80) 平頂隔離插柱

◎材質：Nylon 6/6
◎防火等級：UL 94V-2
◎適用機孔 $\Phi 5.5\text{mm}$


- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Natural
- Hole in chassis dia.: $\Phi 5.5\text{mm}$



品名 ITEM NO.	尺寸 DIMENSIONS		包裝 PACKING
	A mm (in.)	B mm	
MSS-5	5.0 (0.20")	10.0	1,000pcs
MSS-6	6.4 (0.25")	10.0	
MSS-8	8.0 (0.32")	10.0	
MSS-10	10.0 (0.39")	10.0	
MSS-12	12.7 (0.50")	10.0	
MSS-14	14.0 (0.55")	10.0	
MSS-16	15.9 (0.62")	10.0	

P.C.B. FASTENERS


PC 板固定零件




PLASTIC SCREWS (86) 塑膠螺絲

◎材質：採透明 PC 料或 Nylon 6/6 材質
◎用途：適用 PC 板，機板

- Material: PC (Transparent) or Nylon 6/6
- Flammability: UL 94V-2
- For fixation of circuit board or electronic apparatus
- Excellent insulation, light weight, and no rust



TYPE	品名 ITEM NO.	尺寸 DIMENSIONS				包裝 PACKING
		A Φ	B mm	C mm	螺距 PITCH mm	
Nut 螺帽	PN-2	M2	1.4	3.95	0.4	1,000pcs
	PN-3	M3	2.5	5.6	0.5	
	PN-4	M4	3.2	7	0.7	
	PN-5	M5	4	8	0.8	
	PN-6	M6	5	10	1	




TYPE	品名 ITEM NO.	尺寸 DIMENSIONS					包裝 PACKING
		A Φ	B mm	C mm	D mm	螺距 PITCH mm	
Screw 螺絲	PS-306	M3	6	2	5.5	0.5	1,000pcs
	PS-308		8				
	PS-310		10				
	PS-312		12				
	PS-408	M4	8	2.4	7	0.7	
	PS-410		10				
	PS-412		12				
	PS-414		14				
	PS-420		20				
	PS-425		25				
	PS-512	M5	12	3	8.8	0.8	
	PS-520		20				
	PS-530		30				
	PS-535		35				
	PS-620	M6	20	3.5	10.3	1	
	PS-630		30				
	PS-640		40				



PUSH RIVETS (86) 推式鉚釘

◎材質：Nylon 6/6
◎防火等級：UL 94V-2
◎顏色：黑色

- Material: Nylon 6/6
- Flammability: UL 94V-2
- Color: Black
- Installed with fingertip pressure
- Legs expand to securely fasten

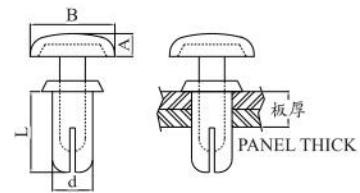

品名 ITEM NO.	尺寸 DIMENSIONS				板厚 PANEL THICK	包裝 PACKING
	Φd mm	L mm	ΦD mm	A mm		
PR-3035	3	3.6	6.3	1.7	1~2	1,000pcs
PR-3045		4.5			2~3	
PR-3055		5.5			3~3.5	
PR-3065		6.5			4~5	
PR-3075		7.5			5~6	
PR-3545	3.5	4.5	7.8	1.9	2~3	
PR-3550		5			2.5~3.5	
PR-4050	4	5	8.0	2	3.5~4.5	
PR-4060		6.1			4.5~5.5	
PR-4070		7.1				



PC 板固定零件



P.C.B. FASTENERS PC 板固定零件





Reliable • Creative • Personal



SCRIVET

- Material: Aluminum

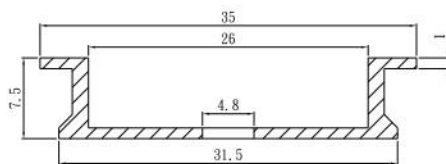


- Material: POM



P.C.B. FASTENERS


PC 板固定零件



TRIM CLIP

◎ 材質：採 POM 料

• Material: POM

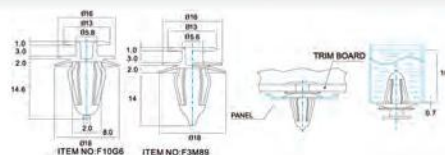


品名 ITEM NO.	尺寸 DIMENSIONS			包裝 PACKING
	孔徑 Panel Hole Dimension mm	板厚 Panel Thickness mm	板厚 Board Thickness mm	
TC-10G6	Φ 8.5	0.8	2.2	1,000pcs
TC-F3M89	Φ 8.5	0.8		1,000pcs



CABLE CLIP

◎ 材質：採 PA6 料


• Material: PA6

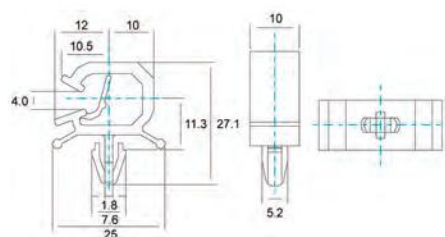

品名 ITEM NO.	尺寸 DIMENSIONS		包裝 PACKING
	孔徑 Hole Dimension mm	板厚 Board Thickness mm	
CC-F3216	Φ 5.4	0.8 ~ 2.0	1,000pcs



DAMPER

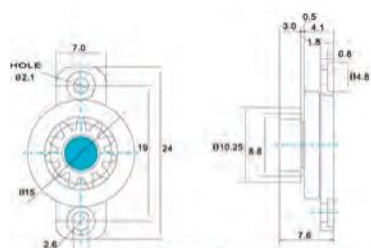

2.1 扭力值(A)-未經過運作前20000次測試的扭力值。
扭力值(B)-經過運作前20000次測試後的扭力值(B)之範圍內。
TORQUE(A) IS DEFINED AS: INITIAL TORQUE BEFORE 20000 TIMES CYCLES TEST.
TORQUE(B) IS DEFINED AS: THE RANGE OF TORQUE AFTER 20000 TIMES CYCLES TEST.

品名 ITEM NO.	尺寸 DIMENSIONS						包裝 PACKING
	種類 Type	齒型 Gear Shape	模數 Module	壓力角 Pressure Angle mm	齒數 Number of Gears	節圓直徑 Ditch Circle Diameter mm	
DM-F001P	Standard Gear	Involute Curve	0.8	20	11	Φ 8.8	1,000pcs

NOTE:

- ◆ Products are warranted to be free from defects in material and workmanship at the time sold by us, but our obligation under this warranty and that of seller is limited to the replacement of the product, Under no circumstances we shall be liable for any loss, damage, expenses, or consequential damages of any kind arising out of the use or inability to use these products.
- ◆ The products are sold with the understanding that the user will test them in actual use and determine their adaptability for the intended uses. Before using, user shall determine the suitability of the product for his intended use. We do not guarantee favorable results or assume any liability in connection with its use. Dimensions contained herein are for reference purposes only. Consult us for specific dimensional requirements.



PRODUCT CATALOG

尼龍束帶 CABLE TIES



Y.Y. CABLE TIES
尼龍束帶 P1-10



POLYPROPYLENE
CABLE TIES
PP束帶 P6



RELEASABLE
TIES
可鬆開式束帶 P11



MOUNTABLE
HEAD TIES
圓頭鎖式束帶 P12



MARKER TIES
標示型束帶 P12



DOUBLE HEAD
CABLE TIE
雙頭式束帶 P13

配線固定零件 TIE MOUNTS CLAMPS



TIE MOUNTS
(SELF-ADHESIVE)
黏式固定座 P23



TIE MOUNTS
(SADDLE TYPE)
馬蹄型固定座 P23



CABLE CLAMPS
配線固定鈕 P24



MANSONRY PUSH
MOUNTS
壁虎固定座 P24



JFC CLIP
J型固定夾 P25



CABLE MOUNT
電線固定夾 P25

配線保護零件 PROTECTS



HEAT SHRINKABLE
TUBINGS
薄壁熱收縮套管 P34



DUAL WALL
(Adhesive-lined)
雙層含膠含水型熱
收縮套管 P35



HEAT SHRINKABLE
TUBING BOX
熱縮管整理盒 P36



HOT AIR GUN
熱風槍 P36



SPLIT FLEXIBLE
CONDUIT
剖開式浪管 P37



SOLID FLEXIBLE
CONDUIT
密閉式浪管 P38

電線接頭端子 CONNECTORS



CLOSED-END
CONNECTORS
閉端端子 P47



WING
CONNECTORS
翼型彈簧式旋轉接頭 P47



WIRE-NUT
CONNECTORS
彈簧螺式接頭 P48



ULTRA
CONNECTORS
插線式連接器 P48



QUICK SPLICE
電源接線夾 P49



ALLIGATOR
CLIPS&TUBES
鱷魚夾 P49



RING NON-INSULATED
TERMINAL
R型裸端子 P59



SPADE NON-
INSULATED TERMINAL
Y型裸端子 P60



NON-INSULATED
PARALLEL SPLICE
短銅管 P60



NON-INSULATED
BUTT CONNECTOR
長銅管 P61




RING TUBULAR
LUGS
R型高壓銅管端子 P61



HAND CRIMPING
TOOLS
端子工具 P62

配線槽 WIRING DUCTS



PLASTIC WIRING
DUCTS
絕緣配線槽 P63-64



WIRING DUCT
COVER
絕緣配線槽蓋 P65



WIRING-DUCT
CUTTER
線槽剪 P65



TELEPHONE
WIRING DUCTS
電話配線槽 P66



DECORATION
WIRING DUCTS
裝潢配線槽 P66



ROUND TYPE
WIRING DUCTS
半圓弧形地板型配
線槽 P67

配線標誌 CABLE MARKERS



CABLE
MARKERS
PVC 配線標誌圈 P68



CABLE MARKER
STRIP
標誌靶 P68



MARKER PLATE
標誌銘牌 P68



OM TYPE
MARKERS
OM 型標誌圈 P69



CLIP-ON CABLE
MARKER
插入式配線標誌 P69



MARKER CARDS
布質配線標誌 P69

電纜固定頭 CABLE GLANDS



NYLON CABLE
GLAND P71-73
MM 型尼龍電纜固定頭



NYLON CABLE
GLAND P74
PG 型尼龍電纜固定頭



NYLON CABLE
GLAND P74
NPT 型尼龍電纜固定頭



MULTI-HOLE
SEAL
多孔內塞

PC板固定零件 P.C.B FASTENERS



LOCKING WIRE
隔離束徑座 P75



TWIST HOLDERS
隔離扭線環 P75



MINIATURE
SUPPORT POST
PC板隔離插柱 P75



DUAL LOCKING
SUPPORTS
雙鉤式隔離插柱 P76



SCREW FASTENED
CIRCUIT BOARD
SUPPORT
平底式隔離插柱 P76



SLIDE SPACER
SUPPORTS
推式隔離插柱 P77



Samples & Complete Catalogue Available 如需樣品和完整目錄歡迎洽詢



DOUBLE-SIDED FOAM TAPE 雙面膠帶 P65



MARKING PEN 速乾筆 P70



MARKING MACHINE 打字機 P70



DAMPER P80



REVERSE SPACER SUPPORT PC 板間隔柱 P77




MUSHROOM SPACER SUPPORTS 平頂隔離插柱 P77



PLASTIC SCREWS 塑膠螺絲 P78



PUSH RIVETS 推式鉚釘 P78



DIN RAILS 鋁軌 P79



ANCHOR CLIP P79



PUSH RIVET P79



SCRIVET P79



TRIM CLIP P80



CABLE CLIP P80



RELIABLE · CREATIVE · PERSONAL
科學化研發 · 專業化製造 · 先進化管理



YONYU GROUP

Y.Y. CABLE ACCESSORIES CO., LTD.
YONYU PLASTICS CO., LTD.
YONYU APPLIED TECHNOLOGY MATERIAL CO., LTD.

精奕興業股份有限公司
永裕塑膠工業股份有限公司
新永裕應用科技材料股份有限公司

WORLDWIDE HEADQUARTER & SALES OFFICE
107, Sheng Li Road, Jen-Teh District,
Tainan City, Taiwan

TEL: 886-6-7020888(REP.) 886-6-2705577
FAX: 886-6-2702943 886-6-2795295

<http://www.yy-yonyu.com.tw> · <http://www.yy-yonyu.com.cn>
E-mail: sales@yy-yonyu.com.tw · Skype: sales-yy

- 新田總廠 HSIN-TIEN FACTORY
台灣省台南市仁德區新田里勝利路107號
- 勝利二廠 SHENG-LI FACTORY
台灣省台南市仁德區新田里勝利路100號
- 勝利三廠 SHENG-LI FACTORY
台灣省台南市仁德區新田里勝利路125號
- 上海總廠 SHANG HAI FACTORY
上海市閩行區常青工業區都會路335弄88號