

YY

Ties with A World of Difference

CABLE ACCESSORIES



SINCE 1964
YONYU GROUP

Y.Y. CABLE ACCESSORIES CO., LTD

CABLE GLANDS

電纜固定頭



YY provides supreme nylon cable glands with IP68 rating. It's UV stabilised and waterproof to 50m. Our cable glands are with wide cable range and high torque to fit installation.

Advantages

- Supreme Reliability
- Durable vibration protection
- Easy installation and waterproof (IP68)
- Excellent strain relief and wide clamp ranges


Application

- Anywhere cables must be safely inserted into housings
- Include aerospace, clean room, industrial, marine
- Panel or enclosure, power or utility and railway
- Telecommunications
- Automation technology
- Machine and apparatus construction
- Shipyards

Technical Data

Material	UL approved Polyamide EPDM for seal insert (Other NBR material is also available)
Flammability	UL 94V-2
Color	Black, Grey, and Light Grey
Protection	Made to comply with IP68 - 5 Bar
Operation temperature	-40° C up to 100° C
Testing Standard	Properties testing according to UL514B IP68 testing according to IEC60529 UL listed and meets VDE ratings
Remark	PG Series is equipped with cable gland body, seal and lock nut only

Features & Components

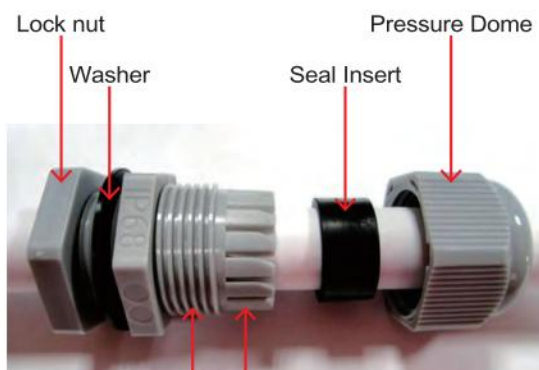

- Easy and quick assembling with good strain relief
- Trapezoid thread for high torque guarantees tight and fit installation

CABLE GLANDS

電纜固定頭

Y.Y. CABLE GLANDS



Metric Type								
品名 ITEM NO.	CABLE GLAND BODY DIMENSIONS				SEAL DIMENSIONS	LOCK NUT DIMENSIONS		包裝 PACKING
	Type MM	適用電纜外徑 CABLE RANGE	螺紋長度 LENGTH L mm	SW mm	I.D. mm	SW mm	H mm	
MM-12X08	M12*1.5	3-6.5	8	15	7	19	5	50pcs
MM-12X15	M12*1.5	3-6.5	15	15	7	19	5	
MM-16X10	M16*1.5	4-10	10	22	11.2	22	5	
MM-16X15	M16*1.5	4-10	15	22	11.2	22	5	
MM-20X10	M20*1.5	7-14	10	27	14.4	24	5	
MM-20X15	M20*1.5	7-14	15	27	14.4	24	5	
MM-25X10	M25*1.5	9-18	10	33	19	33	6	
MM-25X15	M25*1.5	9-18	15	33	19	33	6	
MM-32X10	M32*1.5	15-25	10	42	26	42	7.5	25pcs
MM-32X15	M32*1.5	15-25	15	42	26	42	7.5	
MM-40X10	M40*1.5	23-32	10	53	32.5	53	8	10pcs
MM-40X18	M40*1.5	23-32	18	53	32.5	53	8	
MM-50X12	M50*1.5	30-38	12	60	38	60	9	
MM-50X18	M50*1.5	30-38	18	60	38	60	9	
MM-63X12	M63*1.5	38-48	12	70	48	70	9	5pcs
MM-63X18	M63*1.5	38-48	18	70	48	70	9	
PG Type								
PG-07	07	3-6.5	8	15	7	19	5	100 PCS
PG-09	09	4-8	9	19	9	19	5	
PG-11	11	4-10	10	22	11.2	22	5	
PG-13.5	13.5	6-12	10	24	13	24	5	
PG-16	16	7-14	10	27	14.4	27	5	
PG-21	21	9-18	11	33	19	33	6	50 PCS
PG-29	29	15-25	11	42	26	42	7.5	25 PCS
PG-36	36	23-32	14	53	32.5	53	8	10 PCS
PG-42	42	30-38	14	60	38	60	9	
PG-48	48	38-48	15	70	48	70	9	5 PCS
NPT Type								
NPT-3/8"	3/8"	4-8	15	19	9	-	-	150 PCS
NPT-1/2"	1/2"	6-12	15	24	13	-	-	100 PCS
NPT-3/4"	3/4"	9-18	15	33	19	-	-	50 PCS
NPT-1"	1"	15-25	18	42	26	-	-	25 PCS

CABLE GLANDS

電纜固定頭



NYLON CABLE GLAND

(70) MM 型尼龍電纜固定頭


◎材質：Nylon，夾緊圈 EPDM 橡膠材質
◎防火等級：UL 94V-2
◎顏色：黑色、灰色、灰白色

cULus IP68 Liquid-Tight



- Material: UL approved polyamide; EPDM for seal insert (other NBR material is also available)
- Flammability: UL 94V-2
- Color: Black, Grey, Light Grey
- Protection: made to comply with IP68
- Operating temperature: -40°C up to +100°C
- Applied to machines, control cabinets, instruments for cable installation
- Features: Easy and quick assembling with good strain relief

- ◎特點：1. 夾緊圈經特殊設計，拉力強，對電纜不造成損傷。
2. 電纜可直接穿入鎖緊，省時方便。
3. 可防塵防水
- ◎用途：一般機械控制箱、配電盤、機器等電纜固定保護用。

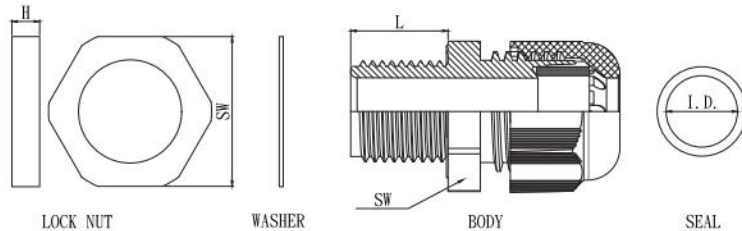

品名 ITEM NO.	CABLE GLAND BODY DIMENSIONS				SEAL DIMENSIONS	LOCK NUT DIMENSIONS		包裝 PACKING
	Type MM	適用電纜外徑 CABLE RANGE	螺紋長度 LENGTH L mm	SW mm	I.D. mm	SW mm	H mm	
MM-12X08	M12*1.5	3-6.5	8	15	7	19	5	50pcs
MM-12X15	M12*1.5	3-6.5	15	15	7	19	5	
MM-16X10	M16*1.5	4-10	10	22	11.2	22	5	
MM-16X15	M16*1.5	4-10	15	22	11.2	22	5	
MM-20X10	M20*1.5	7-14	10	27	14.4	24	5	
MM-20X15	M20*1.5	7-14	15	27	14.4	24	5	
MM-25X10	M25*1.5	9-18	10	33	19	33	6	25pcs
MM-25X15	M25*1.5	9-18	15	33	19	33	6	
MM-32X10	M32*1.5	15-25	10	42	26	42	7.5	10pcs
MM-32X15	M32*1.5	15-25	15	42	26	42	7.5	
MM-40X10	M40*1.5	23-32	10	53	32.5	53	8	10pcs
MM-40X18	M40*1.5	23-32	18	53	32.5	53	8	
MM-50X12	M50*1.5	30-38	12	60	38	60	9	5pcs
MM-50X18	M50*1.5	30-38	18	60	38	60	9	
MM-63X12	M63*1.5	38-48	12	70	48	70	9	
MM-63X18	M63*1.5	38-48	18	70	48	70	9	

CABLE GLANDS

電纜固定頭



NYLON CABLE GLAND

(70)PG 型尼龍電纜固定頭


- ◎材質：Nylon，夾緊圈 EPDM 橡膠材質
- ◎防火等級：UL 94V-2
- ◎顏色：黑色、灰色、灰白色

UL US IP68 Liquid-Tight



- Material: UL approved polyamide; EPDM for seal insert (other NBR material is also available)
- Flammability: UL 94V-2
- Color: Black, Grey, Light Grey
- Protection: made to comply with IP68
- Operating temperature: -40°C up to +100°C
- PG series is equipped with cable gland body, seal and lock nut only
- Applied to machines, control cabinets, instruments for cable installation
- Features: Easy and quick assembling with good strain relief

- ◎特點：1. 夾緊圈經特殊設計，拉力強，對電纜不造成損傷。
2. 電纜可直接穿入鎖緊，省時方便。
3. 可防塵防水
- ◎用途：一般機械控制箱、配電盤、機器等電纜固定保護用。

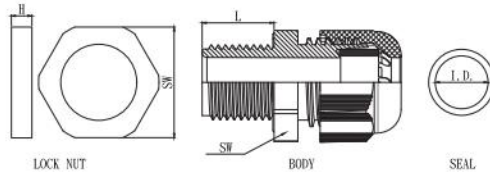

品名 ITEM NO.	CABLE GLAND BODY DIMENSIONS				SEAL DIMENSIONS	LOCK NUT DIMENSIONS		包裝 PACKING
	Type PG	適用電纜外徑 CABLE RANGE	螺紋長度 LENGTH L mm	SW mm	I.D. mm	SW mm	H mm	
PG-07	07	3-6.5	8	15	7	19	5	100pcs
PG-09	09	4-8	9	19	9	19	5	
PG-11	11	4-10	10	22	11.2	22	5	
PG-13.5	13.5	6-12	10	24	13	24	5	
PG-16	16	7-14	10	27	14.4	27	5	
PG-21	21	9-18	11	33	19	33	6	50pcs
PG-29	29	15-25	11	42	26	42	7.5	25pcs
PG-36	36	23-32	14	53	32.5	53	8	10pcs
PG-42	42	30-38	14	60	38	60	9	
PG-48	48	38-48	15	70	48	70	9	5pcs



NYLON CABLE GLAND

(72) NPT 型尼龍電纜固定頭


- ◎材質：Nylon，夾緊圈 EPDM 橡膠材質
- ◎防火等級：UL 94V-2
- ◎顏色：黑色、灰色、灰白色

UL US IP68 Liquid-Tight



- Material: UL approved polyamide; EPDM for seal insert (other NBR material is also available)
- Flammability: UL 94V-2
- Color: Black, Grey, Light Grey
- Protection: made to comply with IP68
- Operating temperature: -40°C up to +100°C
- Applied to machines, control cabinets, instruments for cable installation
- Features: Easy and quick assembling with good strain relief

- ◎特點：1. 夾緊圈經特殊設計，拉力強，對電纜不造成損傷。
2. 電纜可直接穿入鎖緊，省時方便。
3. 可防塵防水
- ◎用途：一般機械控制箱、配電盤、機器等電纜固定保護用。



品名 ITEM NO.	CABLE GLAND BODY DIMENSIONS				SEAL DIMENSIONS	LOCK NUT DIMENSIONS		包裝 PACKING
	Type PG	適用電纜外徑 CABLE RANGE	螺紋長度 LENGTH L mm	SW mm	I.D. mm	SW mm	H mm	
NPT-3/8"	3/8"	4-8	15	19	9	-	-	150pcs
NPT-1/2"	1/2"	6-12	15	24	13	-	-	100pcs
NPT-3/4"	3/4"	9-18	15	33	19	-	-	50pcs
NPT-1"	1"	15-25	18	42	26	-	-	25pcs



PRODUCT CATALOG

尼龍束帶 CABLE TIES



Y.Y. CABLE TIES
尼龍束帶 P1-10



POLYPROPYLENE
CABLE TIES
PP束帶 P6



RELEASABLE
TIES
可鬆開式束帶 P11



MOUNTABLE
HEAD TIES
圓頭鎖式束帶 P12



MARKER TIES
標示型束帶 P12



DOUBLE HEAD
CABLE TIE
雙頭式束帶 P13

配線固定零件 TIE MOUNTS CLAMPS



TIE MOUNTS
(SELF-ADHESIVE)
黏式固定座 P23



TIE MOUNTS
(SADDLE TYPE)
馬蹄型固定座 P23



CABLE CLAMPS
配線固定鈕 P24



MANSONRY PUSH
MOUNTS
壁虎固定座 P24



JFC CLIP
J型固定夾 P25



CABLE MOUNT
電線固定夾 P25

配線保護零件 PROTECTS



HEAT SHRINKABLE
TUBINGS
薄壁熱收縮套管 P34



DUAL WALL
(Adhesive-lined)
雙層含膠含水型熱
收縮套管 P35



HEAT SHRINKABLE
TUBING BOX
熱縮管整理盒 P36



HOT AIR GUN
熱風槍 P36



SPLIT FLEXIBLE
CONDUIT
剖開式浪管 P37



SOLID FLEXIBLE
CONDUIT
密閉式浪管 P38

電線接頭端子 CONNECTORS



CLOSED-END
CONNECTORS
閉端端子 P47



WING
CONNECTORS
翼型彈簧式旋轉接頭 P47



WIRE-NUT
CONNECTORS
彈簧螺式接頭 P48



ULTRA
CONNECTORS
插線式連接器 P48



QUICK SPLICE
電源接線夾 P49



ALLIGATOR
CLIPS&TUBES
鱷魚夾 P49



RING NON-INSULATED
TERMINAL
R型裸端子 P59



SPADE NON-
INSULATED TERMINAL
Y型裸端子 P60



NON-INSULATED
PARALLEL SPLICE
短銅管 P60



NON-INSULATED
BUTT CONNECTOR
長銅管 P61




RING TUBULAR
LUGS
R型高壓銅管端子 P61



HAND CRIMPING
TOOLS
端子工具 P62

配線槽 WIRING DUCTS



PLASTIC WIRING
DUCTS
絕緣配線槽 P63-64



WIRING DUCT
COVER
絕緣配線槽蓋 P65



WIRING-DUCT
CUTTER
線槽剪 P65



TELEPHONE
WIRING DUCTS
電話配線槽 P66



DECORATION
WIRING DUCTS
裝潢配線槽 P66



ROUND TYPE
WIRING DUCTS
半圓弧形地板型配
線槽 P67

配線標誌 CABLE MARKERS



CABLE
MARKERS
PVC 配線標誌圈 P68



CABLE MARKER
STRIP
標誌靶 P68



MARKER PLATE
標誌銘牌 P68



OM TYPE
MARKERS
OM 型標誌圈 P69



CLIP-ON CABLE
MARKER
插入式配線標誌 P69



MARKER CARDS
布質配線標誌 P69

電纜固定頭 CABLE GLANDS



NYLON CABLE
GLAND P71-73
MM 型尼龍電纜固定頭



NYLON CABLE
GLAND P74
PG 型尼龍電纜固定頭



NYLON CABLE
GLAND P74
NPT 型尼龍電纜固定頭



MULTI-HOLE
SEAL
多孔內塞

PC板固定零件 P.C.B FASTENERS



LOCKING WIRE
隔離束徑座 P75



TWIST HOLDERS
隔離扭線環 P75



MINIATURE
SUPPORT POST
PC板隔離插柱 P75



DUAL LOCKING
SUPPORTS
雙鉤式隔離插柱 P76



SCREW FASTENED
CIRCUIT BOARD
SUPPORT
平底式隔離插柱 P76



SLIDE SPACER
SUPPORTS
推式隔離插柱 P77



Samples & Complete Catalogue Available 如需樣品和完整目錄歡迎洽詢



DOUBLE-SIDED FOAM TAPE 雙面膠帶 P65



MARKING PEN 速乾筆 P70



MARKING MACHINE 打字機 P70



DAMPER P80



REVERSE SPACER SUPPORT PC 板間隔柱 P77




MUSHROOM SPACER SUPPORTS 平頂隔離插柱 P77



PLASTIC SCREWS 塑膠螺絲 P78



PUSH RIVETS 推式鉚釘 P78



DIN RAILS 鋁軌 P79



ANCHOR CLIP P79



PUSH RIVET P79



SCRIVET P79



TRIM CLIP P80



CABLE CLIP P80



RELIABLE · CREATIVE · PERSONAL
科學化研發 · 專業化製造 · 先進化管理



YONYU GROUP

Y.Y. CABLE ACCESSORIES CO., LTD.
YONYU PLASTICS CO., LTD.
YONYU APPLIED TECHNOLOGY MATERIAL CO., LTD.

精奕興業股份有限公司
永裕塑膠工業股份有限公司
新永裕應用科技材料股份有限公司

WORLDWIDE HEADQUARTER & SALES OFFICE
107, Sheng Li Road, Jen-Teh District,
Tainan City, Taiwan

TEL: 886-6-7020888(REP.) 886-6-2705577
FAX: 886-6-2702943 886-6-2795295

<http://www.yy-yonyu.com.tw> · <http://www.yy-yonyu.com.cn>
E-mail: sales@yy-yonyu.com.tw · Skype: sales-yy

- 新田總廠 HSIN-TIEN FACTORY
台灣省台南市仁德區新田里勝利路107號
- 勝利二廠 SHENG-LI FACTORY
台灣省台南市仁德區新田里勝利路100號
- 勝利三廠 SHENG-LI FACTORY
台灣省台南市仁德區新田里勝利路125號
- 上海總廠 SHANG HAI FACTORY
上海市閩行區常青工業區都會路335弄88號